## **PCT**

(22) International Filing Date:

# WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



### INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

GB

19 July 1996 (19.07.96)

(71) Applicant (for all designated States except US): CUSSONS (INTERNATIONAL) LIMITED [GB/GB]; Cussons House, Bird Hall Lane, Stockport SK3 0XN (GB).

21 July 1995 (21.07.95)

(72) Inventors; and

(30) Priority Data: 9515023.1

(75) Inventors/Applicants (for US only): HALL, Christopher, John [GB/GB]; 24 Gladstone Avenue, Chester, Cheshire CH1 4JU (GB). YAQUB, Najem [GB/GB]; 47 Frederick Street, Oldham, Lancashire OL8 4AG (GB).

(74) Agent: LOW, Peter, John; 41-51 Royal Exchange, Manchester M2 7BD (GB). CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

#### **Published**

With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: CLEANING COMPOSITION

(57) Abstract

A post-foaming gel composition for use in an aerosol container which composition comprises a base material, said base material consisting at least of a detergent such as an anionic surfactant and a thickener which is preferably an alkanolamide, a glyceryl ester or derivative or blend thereof with betaine or a gum. The base material has a viscosity of at least 9,500 cps, preferably at least 20,000 cps or higher. A foam forming propellant gas such as pentane is mixed with the base material, the propellant being maintained in suspension in the composition until the composition is dispensed from an aerosol.

### FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

	· ·				· ·
AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
ΑU	Australia	GN	Guinea	' NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU-	Hungary	NO	Norway
BF	Burkina Faso	· IE	Ireland	· NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ ·	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgystan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic	SD	Sudan
CF	Central African Republic	<del></del>	of Korea	SE	Sweden
CG '	Congo	KR	Republic of Korea	SG	Singapore
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LR	Liberia	SZ	Swaziland
CS	Czechoslovakia	LT	Lithuania	TD	Chad
CZ	Czech Republic	LU	Luxembourg	TG	Togo
DE	Germany	LV	Latvia	TJ	Tajikistan
DK	Denmark	MC	Monaco	TT.	
EE	Estonia	MD	Republic of Moldova	UA	Trinidad and Tobago Ukraine
ES	Spain	MG	Madagascar	UG	
FI	Finland	ML	Mali		Uganda
FR	France	MN ·		US	United States of America
GA	Gabon		Mongolia	UZ	Uzbekistan
·	Gaodii .	MR	Mauritania	VN	Viet Nam

#### CLEANING COMPOSITION

This invention relates to a cleaning composition and more particularly a personal cleaning composition intended for use in a shower.

Although personal cleaning compositions have been developed for showers, such as shower gels, a significantly large number of people prefer to use a conventional bar of soap rather than a shower gel. is believed that one factor responsible for resistance to the use of shower gels is connected to lather generation. Shower gels are provided in containers or dispensers from which the user must obtain a dose. This finite amount of gel will produce a finite amount In order to produce the lather the user of lather. must apply shear to the gel, for example by rubbing the gel on a part of the body. However, the lather so produced is soon washed away by the stream of water from the shower head. Indeed, in some cases the gel can be washed away and wasted before the user has been able to apply the gel to a part of the body and create a lather. A bar of soap, on the other hand, provides a continuous supply of lather even if the stream of water from the shower head is directed onto the soap bar.

In order to deal with this problem it has been proposed to make provision for the generation of lather

from a shower gel as soon as possible after the gel is dispensed. One way of effecting this is to use an aerosol to contain the gel. On release of the contents of the aerosol a foam in the form of a mousse is formed substantially instantaneously. The problem with this proposal is that it is a widely held belief that the generation of a lather by the user of a cleaning composition is essential for satisfactory cleaning. The application of a preformed lather, even if perfectly efficacious is not thought to be so.

WO96/09032A discloses a soap free post-foaming gel composition which is particularly intended for wet shaving using a razor. The composition is preferably prepared by forming a base material consisting of water, a water soluble N-acyl sarcosinate salt and a non-volatile paraffinic hydrocarbon. To this thin, relatively low viscosity mixture is added a volatile hydrocarbon such as isopentane. This addition causes the formation of a gel structure. While this composition is satisfactory for its intended purpose of a shaving foam it does not perform well for personal washing mainly because it gives an uncomfortable "stripped" feeling to the skin. This effect is believed to be caused by the composition removing the natural skin lipids which gives a "squeaky" skin feel which users dislike.

The present invention is intended to provide a post foaming gel composition for personal cleaning which feels good to use.

According to the invention there is provided a cleaning composition for use in an aerosol container, said composition comprising (a) a base material which consists at least of a detergent and a thickener, said base material having a viscosity greater than 9,500 cps and (b) a foam forming material, at least a part of the foam forming material being maintained in suspension in the composition until after the composition is dispensed from the aerosol.

An important feature of the invention is the viscosity of the base material which is such that the base material is already in the form of a gel prior to the inclusion of the propellant. The minimum viscosity of the base material is, as stated, 9,500 cps (measured on a Brookfield viscometer [spindle 4/speed 20]).

Preferably, however, the viscosity of the base material is considerably higher, for example above 20,000 cps and more preferably above 30,000 cps and particularly preferably above 60,000 cps (on the same basis of measurement). The base material in the form of a gel is stable and enables a high level of propellant to be included in the composition. The viscosity of the gel composition provides for control of the rate of foaming

when the composition is dispensed from the container. In addition the relatively high viscosity of the composition gives stability to the composition during storage prior to use.

It has been found that the foam produced by compositions of the invention have a very different structure to the prior art foams produced from postfoaming compositions. The prior art foam consists of a plurality of small closed cells with a few slightly larger cells here and there. The foam obtained with the invention comprises a plurality of large cells, that is to say up to ten times the size of the largest cells in the prior art foam, with smaller cells filling in the spaces between the larger cells. These smaller cells are in most cases bigger than the largest cells in the prior art foam. The foam of the invention has a high volume and a creamy texture and does not impart the so-called stripping feel to the skin that is experienced with prior art foams.

A preferred embodiment of the invention is intended for use in a shower. In that embodiment a level of propellant is used, for example above 9.0% by weight, which is higher than in prior art foams used for shaving. It has been found that the composition of the invention with such higher levels of propellant are easily rinsed away when used in a shower or other

circumstances such as hand washing. Prior art foam, especially foam intended for shaving, with its small cell structure is less readily rinsed away. A shower foam with such a "tight" structure is less readily rinsed away, but instead remains as a foam when washed from the skin and can clog up the waste outlet.

When the composition of the invention is used the formation of a foam or lather is delayed for a short time after the composition is dispensed by virtue of the propellant gas being retained in suspension. Very shortly after dispense agitation of the composition by the user causes the gas to permeate through the composition and a lather or foam is formed. Thus it appears that the user is responsible for creating the lather or foam as with conventional cleaning materials and the composition is seen as providing the behaviour expected for a good cleaning operation.

The thickener used in the composition of the invention must be one that will maintain the propellant gas in suspension until after the composition is dispensed from the aerosol container. Thickeners useful in the present invention include polyacrylic acids, natural and synthetic clays, alginates, collagen thickeners, cellulose thickeners, gelatin, glycerin based thickeners, guar thickeners, polyquaternium thickeners, xantham gum, acrylate copolymers,

polyethylene glycol thickeners and glycol esters. The · preferred thickeners include alkanolamides such as coconut diethanolamide, glyceryl esters and derivatives and blends thereof such as glyceryl laurate together with cocamidopropyl betaine and guar gums such as hydroxypropyl trimonium chloride. The amount of thickener used depends upon the particular thickener employed. For example in the case of coconut diethanolamide from 0.05 to 20.0%, preferably from about 2 to 4% and more preferably 3.0% by weight will generally be adequate. With the glyceryl laurate/cocamidopropyl betaine blend amounts of from 0.05 to 30% preferably from 5 to 10% by weight are preferably employed.

The composition of the invention requires sufficient foam forming material so that the composition does not thin and separate. In addition the detergent should also be present in an amount which does not result in the composition thinning.

Preferably the amount of detergent should be in the range 0.05 to 60.0% and preferably not less than 7% and more preferably not less than 15% by weight of the total composition.

The particular foam forming material and surfactant system used in the composition is not critical and they can be chosen according to the

particular type of composition that is being formulated.

The preferred foam forming materials are saturated aliphatic hydrocarbons having from 4 to 5 carbons such as n-butane, iso-butane, n-pentane and iso-pentane.

Detergents which can be used in this invention include anionic, cationic, nonionic, amphoteric surfactants and mixtures thereof. Detergents which are useful include alkyl polyglucosides, ethoxylated and non-ethoxylated metal alkyl sulphanates, sultanes, taurates, sarcosinates, sulphonates, ether carboxylates, glycinates, quaternary ammonium compounds, polysorbates, sugar esters, alkyl phosphates, propionates, amino acid surfactants, glysides, alkanolamides and betaines.

The particularly preferred detergents used in the invention are anionic surfactants such as alkali metal alkyl ether sulphates, sulphosuccinates and acyl glutamates. A particularly preferred surfactant is sodium lauryl ether sulphate. If desired a mixture of surfactants can be used. These may be all anionic or may be a combination of anionic with one or more of nonionic, amphoteric and cationic surfactants.

The aerosol container may be any such container that can dispense a post foaming gel.

The invention is further illustrated by the following Examples, reference being also made to the accompanying drawings in which:-

Fig.1 shows the foam of the invention magnified ten times; and

Fig.2 shows a prior art shaving foam also magnified ten times.

#### EXAMPLE 1

The following base material was prepared (all percentages by weight based on the weight of the final composition):-

Cocamidopropyl betaine	1.5%
Cocamidopropyl betaine & glyceryl	
Laurate Blend	7.0%
Aminoxide	0.9%
Sodium lauryl ether sulphate	18.0%
Hydroxypropyl Triammonium Guar	0.3%
Fragrance	0.7%
Water (value adjusted to)	71.6%

The resultant base material had a viscosity of 127, 500 cps using a Brookfield viscometer (spindle 4/speed/1). Isopentane was added in the amount of 10% and the resultant composition charged into a bag within an aerosol container.

Butane was used as the propellant gas outside the bag.

The composition was dispensed as a thick shear thinning gel. Foaming started after dispense and the foaming action was increased by agitation of the gel.

The invention is not limited to the above described specific embodiment and many variations and modifications can be made. In particular the invention is not restricted to shower gels and can be applied to other personal cleaning compositions such as hand wash and facial wash compositions and the like.

The foam of the invention was examined under a microscope at ten times magnification and the result is shown in Fig.1. As can be seen from the Fig. the foam consists of quite large cells 10 of varying shapes with smaller cells 12 filling in spaces between the larger cells. Fig.2 shows the foam produced from a prior art post foaming gel intended for shaving. That foam consists of much smaller, substantially circular cross section cells 14 with a few somewhat larger cells 16 interspersed at random intervals amongst the smaller cells.

The large cell structure of the foam produced by the composition of the invention is believed to be, at least in part, due to the amount of propellant in the composition. Further when the composition is used in a hot shower, the effect of heat on the composition is to cause the propellant to boil off quickly so that a large amount of foam is produced.

The composition of the invention was submitted to a test panel to assess various attributes or properties thereof. The panel also assessed the same attributes of a conventional bath foam and a conventional tablet of soap. The procedure was as follows:-

A small amount of each product was dispensed onto each panellists hand except for the tablet of soap which was used directly. Each panellist "lathered" (i.e. agitated the product) for 15 seconds followed by rinsing for 15 seconds. They then dried their hands with a towel. They were asked to award a score in respect of various attributes in accordance with the following Table 1.

# TUDNE 1

## 1. Ease of Spreading

		•		•
V Difficult	Difficult	Moderate	Easy	V Easy
1 2	3 4	5 6	7 8	9 10
2. Rate Of Lat	ber Build Up			
V Slow	Slow	Moderate	<u>Fast</u>	V Fast
1 2	3 4	5 6	7 8	9 10
3. Amount Of	Lather	• .	· · · ·	
Y Linle	Little	Medium	Much	V.M.

	Texture

Y Thin		Thin		Mod	erate .	Crear	ny ·	V Cr	eamy
1	2	<b>3</b> .	4	5	6	7	8	9	10

# 5. Ease of Rinsing

<u>YD</u>	ifficult	Diff	cult	Mod	icrate		E	asy	VЕ	asv
1	2	3	4	5	- 6	•	7	8	. 9	10

# 6. Feel of Wet Hands

Dislike	Dislike	Dislike	Dislike	Neither like	Like	Like	Like	Like
Extremely	V Much	Moderately	Slightly	Nor Dislike	Slightly	Moderately	Vmuch	Extremely
1	2	3	4	5	6	7	.8	9

# Dry Hands

# 7. Smoothness

<b>V</b> Rough	Rough	Med	liom	Smoo	th	Y	Smooth
1 2	3 4	5	6	7	8	9	10

# 8. Softness

V Ha	<u>rsh</u>	Ha	rsh	Medi	um		Soft		v	Soft
1	2	3	4	5	6	7		8	9	10

# 9. Overall Product Acceptance

Dislike	Dislike	Dislike	Dislike	Neither like	Like	Like	Like	Like
Extremely	V Much	Moderately	Slightly	Nor Dislike	Slightly	Moderately	Vmuch	Extremely
1	2	3	4	5	6	7	8	9

# Skin Feel After 15 mins.

# 10. Smoothness

V Rough	Rough	Medium	Smooth	V Smooth	
1 2	3 4	5 6	7 8	9 10	

# 11. Softness

V Ha	rsh	H	iarsh	Mo	dium	S	oft	<u>v</u>	Soft
1	2 🕝	3	. 4	<b>5</b> .	.6	7	8	9	10

# 12. Overall Product Acceptance

				Neither like		Like	Like	Like
Extremely	V Much	Moderately	Slightly	Nor Dislike	Slightly	Moderately	Vmuch	Extremely
1	2	3	4	5	6	7	8	.9

The results of this evaluation are shown in Table 2.

TABLE 2

Attribute	Bath Foam	Tablet Soap	Invention	Sig Level Invention vs. Best Score)
Ease of Spreading	6.2	7.05	7.85	< 0.1%
Rate of Lather Build Up	5.2	6.15	9.1	> 0.1%
Amount of Lather	5.05	5.7	9.1	> 0.1%
Lather Texture	4.75	6.9	9.15	> 0.1%
Ease of Rinsing	6.45	6.95	7.4	> 10%
Feel of Wet Hands	5.4	5.45	6.65	> 0.1%
Smoothness	6.5	6.0	7.25	> 1.0%
Softness	6.55	5.95	7.65	> 0.1%
Overall Product Acceptance	5.1	5.7	7.65	> 0.1%
Smoothness (after 15 mins)	5.95	5.8	7.35	> 0.1%
Softness (after 15 mins)	5.8	5.6	7.3	>0.1%
Overall Product Acceptance (after 15 mins)	<b>5.1</b> • · · · ·	5.25	7.3	> 0.1%

The method of production of the composition of the invention using different materials is illustrated in the following Examples 2 to 5. The ingredients used in these Examples are listed in the following Table 3. For convenience the ingredients are referred to by the number in the table.

# TABLE 3

Ingredient (CTFA Name)	Trade Name	Supplier
1). Sodium Lauryl Ether Sulphate	•	Hickson-Manro
SLES (25%) 2). Cocamidopropyl Betaine	(Tego Betain L7)	TH Goldschmidt AG.
3). Aminoxide	(Aminoxide WS 35)	TH Goldschmidt AG.
4). Disodium EDTA	· · · · · · · · · · · · · · · · · · ·	· · · · · · · · · · · · · · · · · · ·
5). PEG 7 Glyceryl Cocoate	(Cetiol HE)	Henkel
6). Hydroxypropyl Tri ammonium Guar	- (Jaguar C162)	Rhone Poulenc
7). Fragrance	•	
8). Coconut Diethano amide	ol (Rewomid DC 21)	2/S) Rewo
9). Sodium Cocoyl isethionate	(Elfan AT 84G)	Akzo-Nobel
10). Sodium Cocoyl Glutamate	(Hostapon KCG)	Hoescht
11). Preservative	(Euxyl K400)	Schulke & Mayr
12). Cocoamidopropy Betaine & Glyce Laurate		TH Goldschmidt AG.
13). PEG 4 Rapeseed Amide	i (Aminol N)	Chem - Y
14). PEG 200 Glycer Hydrog. Palmiat (and) PEG 7 Gly Cocoate.	ate	0) Rewo
15). Methyl Cellulos	e (Benecel MP 943	W) Aqualon
16). Water		• • • • • • • • • • • • • • • • • • •

The amounts of the ingredients used in the Examples is set out in the following Table 4.

TABLE 4

•	Example 2	Example 3	Example 4	Example 5
1).	71.50%	54.0%	71.50%	71.50%
2).	5.00%	5.00%	5.00%	5.00%
3).	1.00%	1.00%	1.00%	1.00%
4).	0.15%	0.1%	0.15%	0.15%
5).	1.0%	· · .	1.0%	1.0%
6).	0.3%	0.5%	0.3%	0.3%
7).	0.7%	0.7%	0.7%	0.7%
8).	<u>-</u>	1.0%	-	•
9).	<del>-</del>	5.0%	-	<b>-</b> .
10).	-	3.36%	-	-
11).	0.08%	0.08%	0.08%	0.08%
12).	•	8.00%	-	-
13).	5.00%	<u>-</u>	•	•
14).	, ` •	•	5.00%	•
15).	•	•	•	1.0%
16).	balance	balance	balance	balance

## Example 2

Water was added to (1). The betaine (2) was then added followed by (3). (4) was then dissolved in the mixture. (5)(6) and (7) were mixed together in a premix which was then added to materials (1)-(4). The preservative (11) was then added followed by (13) and the product mixed until a viscosity of 130,000 cps (Brookfield, Spindle RV 4, Speed 0.5) was built.

## Example 3

(8) was dissolved in (16) and then added to (1), (2), (3) and (10) were then added along with (4) until dissolved (6), (7) and (8) were premixed and then added to the aforementioned ingredients. (11) was then added followed by (12) and the product mixed until a viscosity of above 100,000 cps (Brookfield, Spindle RV4, Speed 1) was built.

#### Example 4

Water was added to (1). The betaine (2) was then added followed by (3). (4) was then dissolved in the mixture. (5)(6) and (7) were mixed together in a premix which was then added to materials (1)-(4). The preservative (11) was then added followed by (14) and the product mixed until a viscosity of 60,000 cps (Brookfield, Spindle RV4, Speed 2) was built.

Example-5

Water was added to (1) followed by (15). The betaine (2) was then added followed by (3). (4) was then dissolved in the mixture. (5), (6) and (7) were mixed together in a premix which was then added to materials (1)-(4). The preservative (11) was then added. The viscosity was 26,800 cps (Brookfield, Spindle RV4, Speed 2).


The base materials prepared in the foregoing Examples 2 to 5 were mixed with isopentane (95%) in a 9:1 ratio to produce the post-foaming gel composition of the invention. The composition was then charged to an aerosol can in the same way as in Example 1.

#### CLAIMS

- 1. A cleaning composition for use in an aerosol container, said composition comprising (a) a base material which consists at least of a detergent and a thickener, said base material having a viscosity greater than 9,500 cps and (b) a foam forming material, at least a part of the foam forming material being maintained in suspension in the composition until after the composition is dispensed from the aerosol.
- 2. A composition as claimed in Claim 1, wherein the viscosity is greater than 20,000 and preferably greater than 60,000 cps.
- 3. A composition as claimed in Claim 1 or Claim 2, wherein the thickener is selected from one or more of polyacrylic acids, natural clays, synthetic clays, alginates, collagen thickeners, cellulose thickeners, gelatin, glycerin based thickeners and guar thickeners, polyquaternium thickeners, xantham gum, acrylate copolymers, polyethylene glycol thickeners and glycol esters.
- 4. A composition as claimed in any preceding claim, wherein the thickener is an alkanolamide, a glyceryl ester or derivative thereof or a blend thereof with betaine and/or a gum.

- 5. A composition as claimed in Claim 4, wherein the alkanolamide thickener is present in an amount of from 2 to 4% by weight.
- 6. A composition as claimed in Claim 4, wherein the glyceryl blend is present in an amount of from 5 to 10% by weight.
- 7. A composition as claimed in any preceding claim, wherein the detergent is present in an amount not less than 7.0% by weight of the total composition.
- 8. A composition as claimed in any preceding claim, wherein the detergent is selected from one or more of anionic, cationic, nonionic, amphoteric or mixtures thereof.
- 9. A composition as claimed in any preceding claim, wherein the detergent is selected from one or more of alkyl polyglucosides, ethoxylated metal alkyl sulphanates, sulphanates, non-ethoxylated metal alkyl sulphanates, sultanes, taurates, sarcosinates, sulphonates, ether carboxylates, glycinates, quaternary ammonium compounds, polysorbates, sugar esters, alkyl phosphates, propionates, amino acid surfactants, glysides, alkanolamides or betaines.

10. A composition as claimed in any preceding claim, wherein the foam forming material is a saturated aliphatic hydrocarbon preferably having from 4 to 5 carbons.

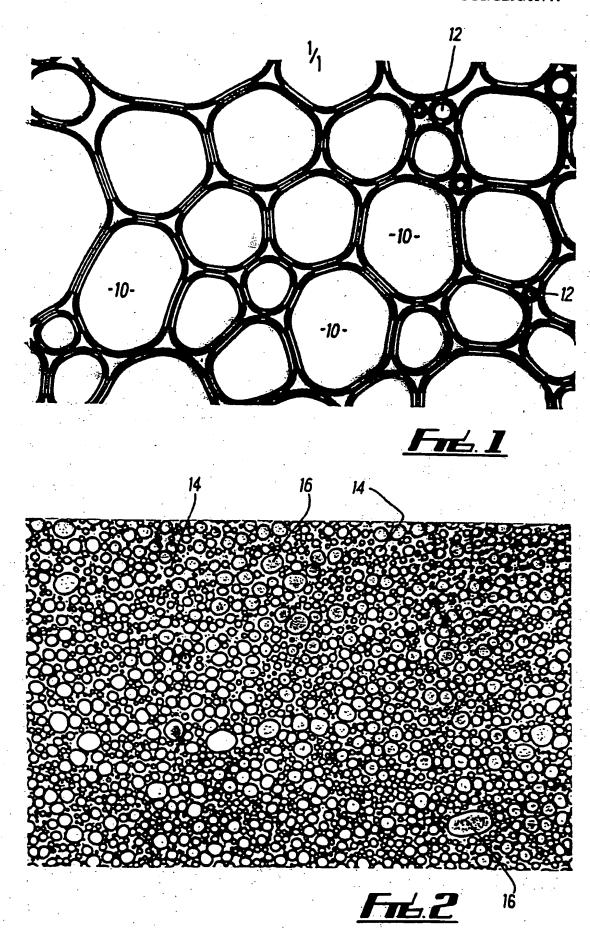

SUBSTITUTE SHEET (RULE 26)

en e		PCT/GB 96/	
A. CLASSIFICATION OF SUBJECT MATTER IPC 6 A61K7/50 A61K7/00	· · · · · · · · · · · · · · · · · · ·		
According to International Patent Classification (IPC) or to both na	ational classification and IPC		
3. FIELDS SEARCHED			: -
Minimum documentation searched (classification system followed b IPC 6 A61K	by classification symbols)	· · · · · · · · · · · · · · · · · · ·	
ocumentation searched other than minimum documentation to the	extent that such documents are	included in the fields sea	ırched
		: .	
electronic data base consulted during the international search (name	e of data base and, where practi	cal, search terms used)	
		· · ·	
. DOCUMENTS CONSIDERED TO BE RELEVANT		·	<del> </del>
Category Citation of document, with indication, where appropria	ate, of the relevant passages		Relevant to claim No.
( WO,A,95 13349 (DOWBRANDS) 1			1,3,4, 7-10
see claims 1-5,8,10,12,13,1 see page 4, line 28 - page see page 10, line 22 - page	8, line 16		
WO,A,95 05796 (UNILEVER) 2	March 1995		1,3,4, 7-10
see page 5, line 34-37; cla see page 6, line 1-35 see page 7, line 9-23	aims 1-3,5		
WO,A,94 02109 (DOWBRANDS) 3 see claims 1-3,14,15 see page 5, line 33 - page see examples 9-12			1,3,7-10
	-/		
Further documents are listed in the continuation of box C.	X Patent fam	ily members are listed in	annex.
Special categories of cited documents:  A' document defining the general state of the art which is not	or priority date	published after the internet and not in conflict with tand the principle or the	the application but
considered to be of particular relevance  e earlier document but published on or after the international filing date  L' document which may throw doubts on priority claim(s) or	cannot be con	articular relevance; the cla sidered novel or cannot be entive step when the docu	e considered to
which is cited to establish the publication date of another citation or other special reason (as specified)  of document referring to an oral disclosure, use, exhibition or other means	cannot be cons document is co	articular relevance; the cli- sidered to involve an inve- ombined with one or mor- mbination being obvious	ntive step when the e other such docu-
P' document published prior to the international filing date but later than the priority date claimed	"&" document men	iber of the same patent fa	<del> </del>
9 December 1996	Date of mailing	1 7. 12. 96	an report
			•
Name and mailing address of the ISA  European Patent Office, P.B. 5818 Patentiaan 2  NL - 2280 HV Rijswijk	Authorized offi	cer .	

Peeters, J